



Air Conditioning

Axial Cliv

Standard Options

- Chiller cooled by air (Horizontal Download)
- Available in cold only
- Capacities of 3, 5 and 10 TR.
- 2-stage Scroll Compressor
- Voltage 220/3/60
- Parametric micro controller
- Microchannel condenser
- Flow Balancing Valve
- Paddle Flow Sensor
- Refrigerant R410-A
- Painting 1,500 Hrs. saline camera
- AHRI certification
- Meets ASHRAE 90.1
- MODBUS language
- Jagged fans
- ETL certification




Additional Options

- Available in Heat Pump
- Anticorrosive protection in the condenser
- BACnet or Lonworks communication card
- Fixed Compressor or Inverter
- Touch screen
- Variable fan
- Voltage 440/3/60 or 220/1/60
- Expansion tank
- Vertical Discharge

FOOTPRINT

	3 Tons		5 Tons		10 Tons	
	ft	in	ft	in	ft	in
Width	3.625	43½"	110.5	43½"	110.5	43½"
Length	2.25	27"	68.5	27"	66	26"
Height	3.416	41"	104.1	41"	193.4	76½"

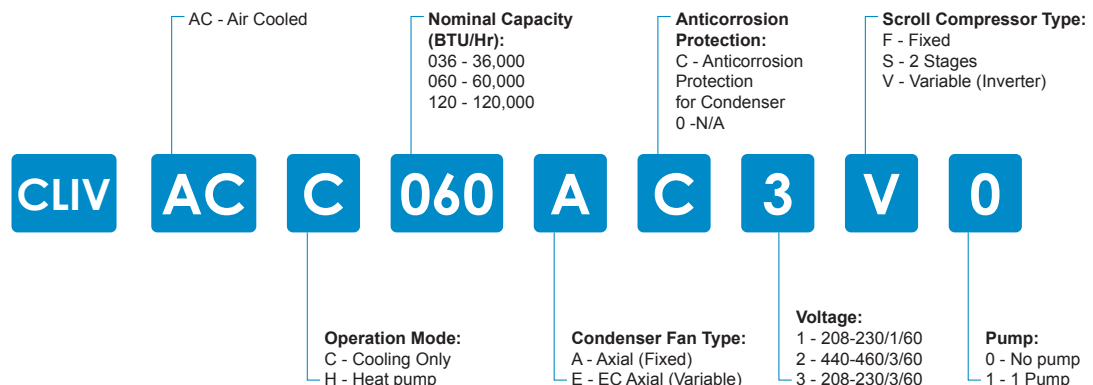

Clima-Flex S.A. de C.V.

Av. Central No. 285, Parque Logístico Industrial, Delegación La Pila. C.P. 78422 San Luis Potosí, S.L.P. México.

+52 (444) 161 5043 | <http://www.comfort-flex.com> | contacto@clima-flex.com