




Air Conditioning
a member of **DAIKIN** group



| | FOOTPRINT | |
|---------------|-----------|---------|
| | 25 Tons | |
| | cm | in |
| Width | 82.7 | 32 5/8" |
| Length | 223.6 | 88" |
| Height | 210.1 | 82 3/4" |

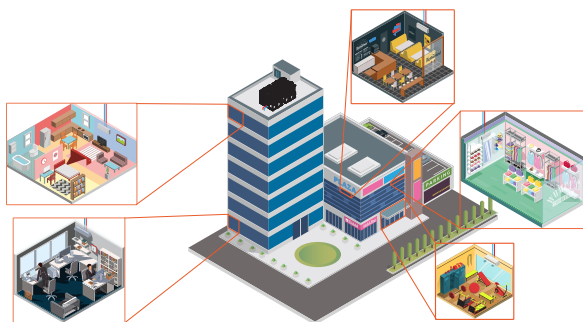

Installation and uses Clic Axial

Clic Axial Series



























Standard Configuration

- Available in cooling only
 - 25 Tons base module
 - Modular configuration from 25 Tons up to 250 T
 - Inverter or fixed scroll compressor
 - Voltage 460 / 3 / 60
 - Microchannel condenser
 - 7" color touch screen control panel (Mother module)
 - MODBUS language
 - Integrated connection to TCP/IP networks (Local area network and Internet)*.
 - Ball valve
 - Flow balancing valve
 - Thermal dispersion sensor (Heat Pump equipment)
 - Filter in each module
 - Decanter Filter (Cooling only equipment)
 - R-410A refrigerant
 - ISO-9227 powder coating (1,500 hour salt spray test)
 - AHRI Certification
 - Meets ASHRAE 90.1
 - Victaulic connection
 - AC fans (Low noise)
 - Equipment eligible for LEED projects
- *Requires connection node


Additional Configuration

- Voltage 208 - 230 / 3 / 60
- Available in heat pump
- Available in heat recovery
- Corrosion protection on condensers
- BACnet communication (Ordered separately)



| | MOTHER UNITS | SON UNITS | | | | | | | |
|----------------------------------|--|--|--|--|---|--|--|--|--|
| 25 Tons CLIC-ACC-300 |  | | | | | | | | |
| 50 Tons CLIC-ACC-600 |  |  | | | | | | | |
| 75 Tons CLIC-ACC-900 |  |  |  | | | | | | |
| 100 Tons CLIC-ACC-1200 |  |  |  |  | | | | | |
| 125 Tons CLIC-ACC-1500 |  |  |  |  |  | | | | |
| 150 Tons CLIC-ACC-1800 |  |  |  |  |  |  | | | |
| 175 Tons CLIC-ACC-2100 |  |  |  |  |  |  |  | | |
| 200 Tons CLIC-ACC-2400 |  |  |  |  |  |  |  |  | |
| 250 Tons CLIC-VL-3000 |  |  |  |  |  |  |  |  |  |

CLIC-300-VL-C-1-A-N-D-F-M-M-N-N-1-6-M-N-D-N-4-P-M

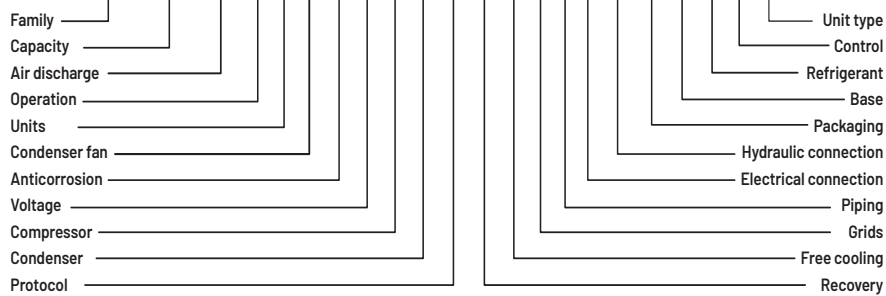

For more information about nomenclatures, please access the following website:



www.clima-flex.com/eng/clic-eng/