



Air Conditioning  
a member of **DAIKIN** group



## Cliv Axial Series

### Standard Configuration

- Air Cooled Chiller (Horizontal discharge)
- Available in cooling only
- Capacity of 3, 5 and 10 Tons
- Fixed scroll compressor
- Voltage 208-230 / 3 / 60
- Parametric microprocessor with segment display
- Microchannel condenser
- Flow balancing valve
- Paddle flow sensor
- R-410A refrigerant
- ISO-9227 Powder coating (1,500 hour salt spray test)
- AHRI Certification
- ASHRAE 90.1 compliant
- MODBUS language
- AC fans (Low noise level)


### Additional Configuration

- Anti-corrosive protection on condenser

#### FOOTPRINT

	5 Tons		10 Tons	
	cm	in	cm	in
<b>Length</b>	110.9	43 11/16"	110.9	43 11/16"
<b>Width</b>	72.3	28 7/16"	72.3	28 7/16"
<b>Height</b>	104	40 15/16"	193.5	76 3/16"

#### CLIV-36-HD-C-1-A-N-D-F-M-M-N-N-1-1-S-N-D-N-4-P-0

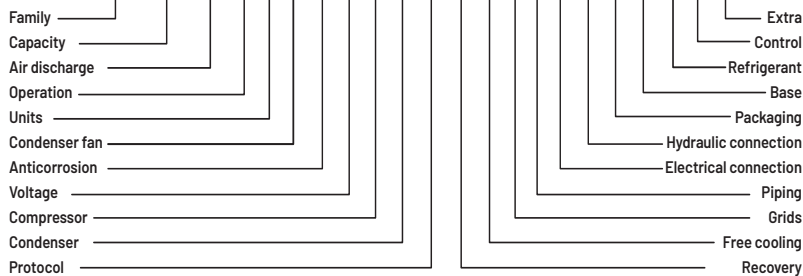

For more information about nomenclatures, please access the following website:



[www.clima-flex.com/eng/cliv-eng/](http://www.clima-flex.com/eng/cliv-eng/)